Little Giant
Ladder Systems

LITTLEGIANTLADDERS.COM

# INDUSTRIAL PRODUCT CATALOG

# PREVENTING INJURIES, SAVING LIVES™

## LITTLE GIANT HAS TAKEN THE NEXT STEP IN CLIMBING EQUIPMENT SAFETY BY CREATING PRODUCTS ENGINEERED TO PROTECT YOU. WE DESIGN TO ACCOUNT FOR HUMAN BEHAVIOR. YOUR SAFETY IS OUR OBSESSION.

Every day at least 2,000 people are injured while using a ladder. Over 100 of them suffer a long-term injury or even permanent disability. Every day one person dies, never returning home to their family.

This fundamental purpose drives Little Giant Ladder Systems® to be the safety and innovation leader in climbing systems and professional access equipment. We have partnered with safety professionals all over the world to develop real solutions to real safety problems.

# HYPERLITE®

**375 LBS RATED | TYPE IAA | 300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT**

1. DOUBLE-PULLEY SYSTEM
2. WALL PAD FEET & V-BAR
3. CLAW® FASTENING SYSTEM
4. LIGHTWEIGHT FIBERGLASS
5. BUBBLE LEVELS (2)
6. HI-VIZ GREEN
7. FLAT RUNGS
8. SURE-SET™ FEET

### CLAW® FASTENING SYSTEM & WALL PADS

Optional add-on: Clamp the ladder to a strand or anchor points. Non-marking wall pads (Select IAA models only)

### GROUND CUE®

An audible “click” on the bottom rung alerts you when you have reached the bottom rung of the ladder. (Select IAA models only)

### SURE-SET™ FEET

Securely stays in place, swivels for use in the spike foot position.

(Select IAA models only)

### RATCHET LEVELER

Allows 3/8” adjustments up to 9” to stabilize the ladder on unlevel ground.

### AUTOLEVELERS

Instantly and automatically adjust to uneven terrain.

| PART NUMBER | DESCRIPTION | HIGHEST STANDING LEVEL | MAX REACH* | WEIGHT |
|---|---|---|---|---|
| 18716 | 16’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 9’ 4” | 15’ 10” | 28 lbs |
| 17516-264V | 16’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw, V-bar and Ratchet Levelers | 9’ 5” | 15’ 11” | 33 lbs |
| 17916 | 16’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue and Sure-Set Feet | 9’ 5” | 15’ 11” | 31 lbs |
| 17916-089 | 16’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks and V-Rung | 9’ 4” | 15’ 10” | 35 lbs |
| 17916-246V | 16’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with V-bar and Ratchet Levelers | 9’ 8” | 16’ 7” | 38 lbs |
| 17916-268V | ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, V-bar and Sure-Set Feet | 9’ 5” | 15’ 11” | 32 lbs |
| 18720 | 20’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 13’ 2” | 19’ 8” | 36 lbs |
| 17920 | HYPERLITE, 20’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue and Sure-Set Feet | 13’ 3” | 19’ 9” | 38 lbs |
| 17920-186 | 20’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, V-Rung and Sure-Set Feet | 13’ 2” | 19’ 8” | 39 lbs |
| 17920-246V | 20’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with V-bar and Ratchet Levelers | 13’ 6” | 20’ | 38 lbs |
| 17920-269 | 20’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with V-Rung and Ratchet Levelers | 13’ 6” | 20’ | 44 lbs |
| 18324 | 24’ Type IA Claw, Cable Hooks & Pole Strap** | 17’ 0” | 23’ 6” | 50 lbs |
| 18324V | 24’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw and V-bar | 17’ 0” | 23’ 6” | 50 lbs |
| 18724 | 24’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 17’ 0” | 23’ 6” | 44 lbs |
| 18724-186 | 24’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder with V-Rung | 17’ 0” | 23’ 9” | 42 lbs |
| 17524-184V | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw, V-bar and Auto-Levelers | 17’ 3” | 23’ 9” | 55 lbs |
| 17524-264V | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw, V-bar and Ratchet Levelers | 17’ 3” | 23’ 9” | 55 lbs |
| 17524-274V | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, Claw V-bar and Auto-Levelers | 17’ 3” | 23’ 9” | 56 lbs |
| 17524V | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, Claw, V-bar and Sure-Set Feet | 17’ 1” | 23’ 7” | 48 lbs |
| 17924 | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue and Sure-Set Feet | 17’ 1” | 23’ 7” | 45 lbs |
| 17924-089 | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks and V-Rung | 17’ 1” | 23’ 7” | 45 lbs |
| 17924-186 | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue V-Rung and Sure-Set Feet | 17’ 1” | 23’ 7” | 45 lbs |
| 17924-246PS | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Adjustable Pole Strap and Ratchet Levelers | 17’ 3” | 23’ 9” | 50 lbs |
| 17924-246V | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with V-bar and Ratchet Levelers | 17’ 3” | 23’ 9” | 50 lbs |
| 17924-269 | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with V-Rung and Ratchet Levelers | 17’ 3” | 23’ 9” | 50 lbs |
| 18328 | 28’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw and Pole Strap** | 20’ 10” | 27’ 4” | 52 lbs |
| 18328V | 28’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw and V-bar | 20’ 10” | 27’ 4” | 52 lbs |
| 18728 | 28’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 20’ 10” | 27’ 4” | 50 lbs |
| 18728-186 | 28’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder with V-Rung | 20’ 10” | 27’ 4” | 52 lbs |
| 17528 | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, Claw, Pole Strap,** Sure-Set Feet | 20’ 11” | 27’ 5” | 54 lbs |
| 17528-184V | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw, V-bar and Auto-Levelers | 20’ 11” | 27’ 5” | 54 lbs |
| 17528-264 | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw, Pole Strap** and Ratchet Levelers | 20’ 11” | 27’ 5” | 54 lbs |
| 17528-274V | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, Claw, V-bar and Auto-Levelers | 20’ 11” | 27’ 5” | 54 lbs |
| 17528V | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, Claw, V-bar and Sure-Set Feet | 20’ 11” | 27’ 5” | 54 lbs |
| 17928 | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue and Sure-Set Feet | 20’ 11” | 27’ 5” | 52 lbs |
| 17928-087 | 28’ - ANSI Type IAA - 375 lb Rated Fiberglass Extension Ladder Cable Hooks, V-Rung and Auto-Levelers | 20’ 11” | 27’ 5” | 52 lbs |
| 17928-089 | 28’ - ANSI Type IAA - 375 lb Rated Fiberglass Extension Ladder with Cable Hooks and V-Rung | 20’ 11” | 27’ 5” | 52 lbs |
| 17928-246PS | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Adjustable Pole Strap and Ratchet Levelers | 20’ 11” | 27’ 5” | 52 lbs |
| 17928-246V | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with V-bar and Ratchet Levelers | 20’ 11” | 27’ 5” | 52 lbs |
| 18732 | 32’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 24’ 7” | 31’ 1” | 63 lbs |
| 17532-184V | 32’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw,, V-bar and Auto-Levelers | 24’ 8” | 31’ 2” | 65 lbs |
| 17532-264V | 32’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw,, V-bar and Ratchet Levelers | 24’ 8” | 31’ 2” | 65 lbs |
| 17532-274V | 32’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, Claw, V-bar and Auto-Levelers | 24’ 8” | 31’ 2” | 65 lbs |
| 17532V | 32’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, CLAW, V-bar and Sure-Set Feet | 24’ 8” | 31’ 2” | 65 lbs |
| 17932 | 32’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue and Sure-Set Feet | 24’ 8” | 31’ 2” | 62 lbs |
| 17932-089 | 32’ - ANSI Type IAA - 375 lb Rated Fiberglass Extension Ladder with Cable Hooks and V-Rung | 24’ 8” | 31’ 2” | 62 lbs |
| 17932-246V | 32’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with V-bar and Ratchet Levelers | 24’11” | 31’ 5” | 77 lbs |
| 17740 | 40’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 30’ 5” | 36’ 11” | 80 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH
COMPLIES WITH ALL OSHA, ANSI A14 STRENGTH AND TESTING STANDARDS. RUNG/STEP SPACING COMPLIES TO OSHA AND INT’L STANDARDS. OSHA 1910.23, OSHA 1926.10.53, OSHA Z11, EN131-1, AS/NZS 1892.2.6.2

# SUMOSTANCE®

**375 LBS RATED | TYPE IAA | 300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT**

1. NON-MARKING WALL PAD FEET
2. DOUBLE-PULLEY SYSTEM
3. LIGHTWEIGHT FIBERGLASS
4. BUBBLE LEVELS
5. HI-VIZ GREEN
6. GROUND CUE®
7. WIDE-STANCE LEVELERS
8. SURE-SET™ FEET

## WIDE-STANCE LEVELING & OUTRIGGING

When fully opened, the SumoStance outriggers provide 9” of leveling adjustment and expand 37”, increasing side-tip stability up to 600%.

## CLAW® FASTENING SYSTEM & WALL PADS

Optional add-on: Clamp the ladder to the strand or anchor points. Non-marking wall pads (IAA versions)

## SIDE, DOUBLE-PULLEY SYSTEM

Keep your feet free. We moved the pulley to the side of the ladder for safety and incorporated double-pulleys to make operation simple. Getting enough leverage to raise the ladder is fast and easy.

## LIGHTEST FIBERGLASS ON THE MARKET

More speed, less fatigue. We made the SumoStance out of lightweight fiberglass so you can move your ladder with ease.

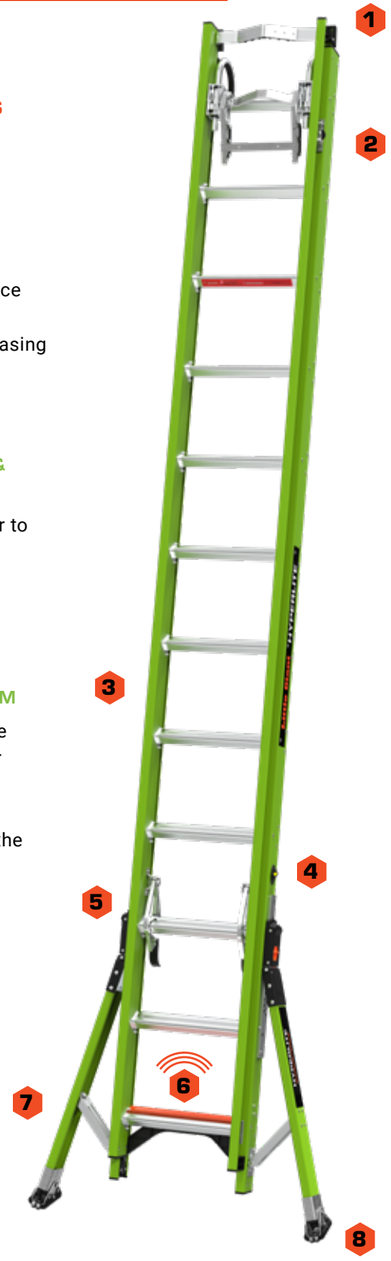


## PROVIDES EXTRA STABILITY, ESPECIALLY ON 32’, 36’ AND 40’ LADDERS

| PART NUMBER | DESCRIPTION | HIGHEST STANDING LEVEL | MAX REACH* | TRIANGLE RUNG WIDTH | STORAGE HEIGHT | STORAGE WIDTH | WEIGHT |
|---|---|---|---|---|---|---|---|
| 18816 | 16’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 9’ 8” | 16’ 2” | 1.5” | 8’ 9” | 1’ 10” | 38 lbs |
| 18816-280 | 16’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder with Wall Pads and Climbing Angle Bubble Level | 9’8” | 16’ 2” | 1.5” | 8’ 9” | 1’ 10” | 35 lbs |
| 17216 | 16’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue and Sure-Set Feet | 9’ 9” | 16’ 3” | 1.5” | 8’ 9” | 1’ 10” | 39 lbs |
| 17216-186 | 6’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, V-BAR, and Sure-Set Feet | 9’ 9” | 16’ 3” | 1.5” | 8’ 9” | 1’ 10” | 42 lbs |
| 18820 | 20’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 13’ 6” | 20’ | 1.5” | 10’ 9” | 1’ 10” | 38 lbs |
| 17220 | 20’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue and Sure-Set Feet | 13’ 4” | 20’ | 1.5” | 10’ 9” | 1’ 10” | 46 lbs |
| 17220-186 | 20’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, V-Rung and Sure-Set Feet | 13’ 6” | 20’ | 1.5” | 10’ 9” | 1’ 10” | 39 lbs |
| 18824 | 24’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 17’ 3” | 23’ 9” | 1.5” | 12’ 9” | 1’ 10” | 52 lbs |
| 17224 | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue and Sure-Set Feet | 17’ 4” | 23’ 10” | 1.5” | 12’ 9” | 1’ 10” | 52 lbs |
| 17224-186 | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, V-Rung and Sure-Set Feet | 13’ 6” | 20’ | 1.5” | 10’ 9” | 1’ 10” | 49 lbs |
| 17624 | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, Claw,, Pole Strap and Sure-Set Feet | 17’ 4” | 23’ 10” | 1.5” | 12’ 9” | 1’ 10” | 56 lbs |
| 17624V | 24’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, CLAW, V-bar and Sure-Set Feet | 17’ 4” | 23’ 10” | 1.5” | 12’ 9” | 1’ 10” | 56 lbs |
| 18428V | 28’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder with Cable Hooks, Claw, and V-bar | 21’ 1” | 27’ 7” | 1.5” | 14’ 8” | 1’ 10” | 52 lbs |
| 18828 | 28’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 21’ 1” | 27’ 7” | 1.5” | 14’ 9” | 1’ 10” | 57 lbs |
| 18828-186 | 28’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder with V-Rung | 21’ 1” | 27’ 7” | 1.5” | 14’ 9” | 1’ 10” | 57 lbs |
| 18828-280 | 28’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder with Wall Pads and Climbing Angle Bubble Level | 21’ 1” | 27’ 7” | 1.5” | 14’ 9” | 1’ 10” | 57 lbs |
| 17228 | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue and Sure-Set Feet | 21’ 2” | 27’ 8” | 1.5” | 14’ 8” | 1’ 10” | 59 lbs |
| 17228-186 | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, V-Rung and Sure-Set Feet | 21’ 2” | 27’ 8” | 1.5” | 14’ 8” | 1’ 10” | 60 lbs |
| 17628 | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, Claw,, Pole Strap and Sure-Set Feet | 21’ 2” | 27’ 8” | 1.5” | 14’ 8” | 1’ 10” | 62 lbs |
| 17628V | 28’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, Claw,, V-bar and Sure-Set Feet | 21’ 2” | 27’ 8” | 1.5” | 14’ 8” | 1’ 10” | 62 lbs |
| 18832 | 32’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder | 24’ 11” | 31’ 5” | 1.5” | 16’ 8” | 1’ 10” | 72 lbs |
| 18832-280 | 32’ - ANSI Type IA - 300 lb Rated, Fiberglass Extension Ladder with Wall Pads and Climbing Angle Bubble Level | 24’ 11” | 31’ 5” | 1.5” | 16’ 8” | 1’ 10” | 72 lbs |
| 17232 | 32’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue and Sure-Set Feet | 25’ | 31’ 6” | 1.5” | 16’ 8” | 1’ 10” | 69 lbs |
| 17232-186 | 32’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, V-Rung and Sure-Set Feet | 25’ | 31’ 6” | 1.5” | 16’ 8” | 1’ 10” | 70 lbs |
| 17632V | 32’ - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Ground Cue, Cable Hooks, Claw, V-bar and Sure-Set Feet | 25’ | 31’ 6” | 1.5” | 16’ 8” | 1’ 10” | 76 lbs |
| 17840 | 40’ - ANSI Type IA - 300 lb Rated,fiberglass Extension Ladder | 30’ 8” | 37’ 2” | 1.5” | 20’ 7” | 1’ 10” | 81 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH
** ADD V TO THE END OF THE PART NUMBER TO REPLACE THE POLE STRAP WITH A V-BAR
COMPLIES WITH ALL OSHA, ANSI A14 STRENGTH AND TESTING STANDARDS. RUNG/STEP SPACING COMPLIES TO OSHA AND INT’L STANDARDS. OSHA 1910.23, OSHA 1926.10.53, OSHA Z11, EN131-1, AS/NZS 1892.2.6.2

# LIMITED ARREST SYSTEM

**FOR HYPERLITE AND SUMOSTANCE LADDERS**

## CONFIDENCE + SAFETY IN CLIMBING

The Limited Arrest is an integrated rope system that when harnessed in, keeps the user safely secured to their lifeline rope.

We partnered with Petzl®, the #1 climbing company in the world, to create this state-of-the art system to make sure you go home to your family safe.

## SECURE TO STRAND OR POLE FOR ENHANCED PROTECTION

For Strand and Pole use only. Not designed for building or home use.

| PRODUCT | PART NUMBER | DESCRIPTION | WEIGHT |
|---|---|---|---|
| Sumostance | 17624-247 | 24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit | 56 lbs |
| Sumostance | 17624-279 | 24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit | 59 lbs |
| Sumostance | 17628-279 | 28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit | 68.4 lbs |
| HyperLite | 17524-279 | 24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit | 53 lbs |
| HyperLite | 17524-282 | 24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and RATCHET Levelers - To be used with PETZL ASAP Kit | 61 lbs |
| HyperLite | 17524-285 | 24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and auto-levelers - To be used with PETZL ASAP Kit | 48 lbs |
| HyperLite | 17524-247 | 24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit | 48 lbs |
| HyperLite | 17528-279 | 28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit | 54 lbs |
| HyperLite | 17528-282 | 28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and auto-levelers - To be used with PETZL ASAP Kit | 54 lbs |
| HyperLite | 17528-275 | 28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and AUTO-LEVELERS - To be used with PETZL ASAP Kit | 54 lbs |
| HyperLite | 17528-267 | 28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and RATCHET Levelers - To be used with PETZL ASAP Kit | 54 lbs |
| HyperLite | 17528-247 | 28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit | 54 lbs |
| Petzl Accessory Kit | 11750 | ASAP Ascender and 'Sorber (Carabiners included on all ASAP kits) | 2.16 lbs |
| Petzl Accessory Kit + Bag | 11751 | ASAP Ascender and 'Sorber including top and bottom bags with stabalizer straps for pole use on Hyperlite | 5.5 lbs |
| Petzl Accessory Kit + Bag | 11752 | ASAP Ascender and 'Sorber including top bag with stabalizer straps for pole use on Sumostance | 3.8 lbs |

*** A 5' 6" PERSON WITH A 12" VERTICAL REACH**
**Harness not included**
**Complies with all OSHA, ANSI A14 strength and testing standards. Rung/step spacing complies to OSHA and Int'l Standards.***
***OSHA 1910.23, OSHA 1926.10.53, OSHA Z11, EN131-1, AS/NZS 1892.2.6.2**

# A-FORCE 300™

**300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT**

1. NEXT-LEVEL TOP CAP
2. SINGLE-HANDED SPREADER STEP**
3. COMFORT GRIP CARRY HANDLE
4. NON-CONDUCTIVE FIBERGLASS RAILS
5. FIELD-REPLACABLE FEET

### SINGLE-HANDED SPREADER STEP

Easy setup with built-in comfort. The patent-pending spreader step gives you four extra inches of standing room on the final standing step, as well as an easy hand hold for deployment and takedown.

### NEXT-LEVEL TOP CAP

Four ports on the sides and rear of the top cap accept compatible Little Giant accessories. Add in drill bit holders, clip holsters slots for drills and tape measures, friction locks for gallon or quart cans, and a magnetic fastener tray, and you've got a full toolbelt at the top of your ladder.

| PART NUMBER | MODEL | RATING | HIGHEST STANDING LEVEL | MAX REACH* | SPREAD | STEP WIDTH | STORAGE HEIGHT | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|---|---|---|
| 15794-001 | 4′ | 1A | 1′ 11″ | 8′ 5″ | 30″ | 3″ | 4′ | 1′ 9″ | 7″ | 16.5 lbs |
| 15796-001 | 6′ | 1A | 3′ 10″ | 10′ 4″ | 43″ | 3″ | 6′ | 2′ | 7″ | 23 lbs |
| 15798-001 | 8′ | 1A | 5′ 9″ | 12′ 3″ | 56″ | 3″ | 8′ | 2′ 3″ | 7″ | 32 lbs |
| 15800-001 | 10′ | 1A | 7′ 8″ | 14′ 2″ | 67″ | 3″ | 10′ | 2′ 6″ | 7″ | 40 lbs |
| 15802-001 | 12′ | 1A | 9′ 7″ | 16′ 1″ | 80″ | 3″ | 12′ | 2′ 1.25″ | 7″ | 49 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH ** NOT AVAILABLE ON THE 10′ AND 12′ MODELS.



# A-FORCE 375™

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. VERSATILE TOP CAP
2. TOOL HOLSTERS
3. XL SPEADER STEP
4. GROUND CUE®
5. NON-CONDUCTIVE FIBERGLASS
6. FIELD-REPLACABLE FEET

### COMFORT PLATFORM

Stand on the comfort platform for a more balanced and safe working experience.

### TOOL HOLSTERS

It's the best way to hold and reach your tools on both sides of the ladder.

### GROUND CUE®

An audible "click" on the bottom step alerts you when you have reached the final step of the ladder.

| PART NUMBER | MODEL | RATING | HIGHEST STANDING LEVEL | MAX REACH* | SPREAD | STEP WIDTH | STORAGE HEIGHT | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|---|---|---|
| 15824-001 | 4′ | 1AA | 1′ 11″ | 8′ 5″ | 30″ | 3″ | 4′ | 1′ 9″ | 7″ | 19 lbs |
| 15826-001 | 6′ | 1AA | 2′ 8.5″ | 9′ 2.5″ | 43″ | 3″ | 6′ | 2′ | 7″ | 26.5 lbs |
| 15828-001 | 8′ | 1AA | 3′ 7.5″ | 10′ 1.75″ | 56″ | 3″ | 8′ | 2′ 1.25″ | 7″ | 33.5 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH COMFORT PLATFORM 13″ X 8″

INDUSTRIAL

# KING KOMBO®

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

QUAD POD

**4' INDUSTRIAL MODEL**

Differs from other sizes with a palm-button hinge and modified V-bar, rather than a Grip-N-Go hinge and Quad Pod.

It's the pro tool that helps you get stuff done faster than ever. The pinnacle of ladder technology, the King Kombo™ from Little Giant Ladder Systems® is tough as nails and versatile enough for any tradesperson. Recognized for its superior safety and innovation, the King Kombo is the most awarded ladder ever, having received awards at the 2019 Pro Tool Innovation Awards, 2019 OH&S New Product of the Year Awards, SAFE Awards from the National Association of Homebuilders and more.

INSIDE CORNER

OUTSIDE CORNER

FLAT WALL

2X4 STUD

### 1. ROTATING WALL PAD

Two different positions for leaning on inside corners, outside corners, walls and 2x4 studs.

### 2. ONE-HANDED GRIP-N-GO™ HINGE

New easy-to-use hinge allows smooth trasition from storage to a-frame to extension positions.

### 3. GROUND CUE®

Newly redesigned for improved performance. Provides an audible "click" on bottom step that alerts you when you have reached the bottom step of the ladder.

### 4. RAIL GUARD

Shock-absorbing braces increase ladder lifespan by protecting it during daily use.

### 5. NON-CONDUCTIVE RAILS

Non-conductive fiberglass rails rated to hold up to 375 lbs.

### 6. FUNCTIONAL REAR SECTION

At 14" on center, access tight workspaces between wall studs, ceiling trusses and roof or attic access ports.

### 7. QUAD POD™

For use in the extension position, the Quad Pod™ allows the ladder to be leaned on inside and outside corners, walls, poles and 2x4 studs. Also serves as a tool tray.

### DID YOU KNOW?

The King Kombo's legs are wide for stability on the climbing side and narrow on the extension side for ease of access through studs and attic access ports.

| PART NUMBER | MODEL | STEPLADDER HIGHEST STANDING LEVEL | STEPLADDER MAX REACH* | EXTENSION HIGHEST STANDING LEVEL | EXTENSION MAX REACH* | SPREAD | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|---|---|
| 13905-072 | 5'-8' | 2' 10" | 9' 4" | 4' 10" | 11' 4" | 3' 0" | 2' 0.5" | 7" | 24 lbs |
| 13906-072 | 6'-10' | 3' 9" | 10' 3" | 6' 7" | 13' 1" | 3' 8" | 2' 1" | 7" | 27 lbs |
| 13908-072 | 8'-14' | 5' 8" | 12' 2" | 10' 8" | 17' 2" | 4' 11" | 2' 4" | 7" | 34 lbs |

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
** 13470-071 HAS 1.0 PALM BUTTON HINGE AND V-BAR

TECHNICAL

# KING KOMBO®

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. ROTATING WALL PAD
2. 3” WIDE STEPS
3. GROUND CUE®
4. NON-CONDUCTIVE RAILS
5. FLOATING RAIL BRACE
6. FUNCTIONAL REAR SECTION
7. V-BAR
8. WALL PAD FEET

The King Kombo Technical model has all the bells and whistles. The Technical Sure-Set Feet, Ground Cue and versatile V-Rung set it apart from other King Kombo models.

SURE SET FEET

OKS 2019 NEW PRODUCT OF THE YEAR

AMERICAN SOCIETY OF SAFETY PROFESSIONALS

PTIA 2019 AWARD WINNER

NAHB National Association of Home Builders



# GET CLOSER TO YOUR WORK

**ROTATING WALL PAD / V-BAR**

INSIDE CORNER

OUTSIDE CORNER

FLAT WALL

POLE

LEANING

STEPLADDER

EXTENSION

| PART NUMBER | MODEL | STEPLADDER HIGHEST STANDING LEVEL | STEPLADDER MAX REACH* | EXTENSION HIGHEST STANDING LEVEL | EXTENSION MAX REACH* | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|---|
| 13906-074 | 6′ | 3′ 9″ | 10′ 3″ | 6′ 7″ | 13′ 1″ | 2′ 4″ | 7″ | 28.5 lbs |
| 13712-074** | 7′ | 4′ 8″ | 11′ 2″ | 8′ 9″ | 15′ 3″ | 2′ 4″ | 7″ | 27 lbs |
| 13908-074 | 8′ | 5′ 8″ | 12′ 2″ | 10′ 4″ | 17′ 2″ | 2′ 4″ | 7″ | 35.5 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH
**13712-074 HAS A 1.0 PALM BUTTON HINGE AND NOT COMPATIBLE WITH LITTLE GIANT ACCESSORIES

PROFESSIONAL

# KING KOMBO®

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. ROTATING WALL PAD
2. ONE-HANDED GRIP-N-GO HINGE
3. NON-CONDUCTIVE FIBERGLASS
4. THIN PROFILE FOR USER MOBILITY
5. INCREASED SIDE-TIP STABILTY

### LEANS ON ALMOST ANYTHING

The rotating wall pad helps adjust to inside and outside corners, flat walls and poles.

### EXTENSION

Quickly adjusts to an extension ladder so you always have the ladder you need.

| PART NUMBER | MODEL | STEPLADDER HIGHEST STANDING LEVEL | STEPLADDER MAX REACH* | EXTENSION HIGHEST STANDING LEVEL | EXTENSION MAX REACH* | STORAGE WIDTH | SPREAD | WEIGHT |
|---|---|---|---|---|---|---|---|---|
| 13905-001 | 5′ | 2′ 10″ | 9′ 4″ | 4′ 10″ | 11′ 4″ | 2′ | 3′ | 19 lbs |
| 13906-001 | 6′ | 3′ 9″ | 10′ 3″ | 6′ 7″ | 13′ 1″ | 2′ 1″ | 3′ 8″ | 23 lbs |
| 13908-001 | 8′ | 5′ 8″ | 12′ 2″ | 10′ 4″ | 17′ 2″ | 2′ 4″ | 4′ 11″ | 31 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH



# KING KOMBO® XT

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. ROTATING WALL PAD
2. ONE-HANDED GRIP-N-GO HINGE
3. NON-CONDUCTIVE FIBERGLASS
4. EXTENDABLE REAR SECTION
5. GROUND CUE®
6. V-BAR
7. FIELD-REPLACEABLE FEET

### LEANS ON ALMOST ANYTHING

The rotating wall pad helps adjust to inside and outside corners, flat walls and poles.

### EXTENSION

Quickly adjusts to an extension ladder so you always have the ladder you need.

### EXTEND TO FIT THE TERRAIN

Three feet of added extension with parallel rails means you never have to worry you ladder is too small, it just extends.

| PART NUMBER | MODEL | STEPLADDER HIGHEST STANDING LEVEL | STEPLADDER MAX REACH* | EXTENSION HIGHEST STANDING LEVEL | EXTENSION MAX REACH* | STORAGE WIDTH AT BASE | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|---|
| 13963-071 | 6 | 3′ 9″ | 10′ 3″ | 2′ 10″ - 9′ 5″ | 15′ 11″ | 2′ 1″ | 8″ | 35.5 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH

# SENTINEL®

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. ROTATING WALL PAD
2. EXTRA WIDE COMFORT STEPS
3. NON-CONDUCTIVE FIBERGLASS RAILS
4. RAIL LOCKS
5. GROUND CUE®

INSIDE CORNER

OUTSIDE CORNER

FLAT WALL

2X4 STUD

### RAIL LOCKS

Keep the Sentinel's rails locked securely together while in the leaning position, storage and transit.

| PART NUMBER | MODEL | STEPLADDER HIGHEST STANDING LEVEL | STEPLADDER MAX REACH* | SPREAD | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|
| 15910-002 | 10′ | 7′ 8″ | 14′ 2″ | 5′ 4″ | 2′ 2″ | 7″ | 40 lbs |
| 15912-002 | 12′ | 9′ 7″ | 16′ 1″ | 6′ 3″ | 2′ 4″ | 7″ | 48 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH



# MIGHTYLITE™

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. VERSATILE TOP CAP
2. COMFORT PLATFORM
3. GROUND CUE®
4. SLIM STORAGE PROFILE
5. FLOATING RAIL BRACE
6. NON-CONDUCTIVE FIBERGLASS RAILS

### COMFORT PLATFORM

Stand on the comfort platform for a more balanced and safe working experience.

### SUPER LIGHTWEIGHT

It's right in the name. Carry your ladder, your gear and still have muscles to spare.

### GROUND CUE®

An audible "click" on bottom step alerts you when you have reached the final bottom step of the ladder.

| PART NUMBER | MODEL | RATING | HIGHEST STANDING LEVEL | MAX REACH* | SPREAD | STEP WIDTH | STORAGE HEIGHT | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|---|---|---|
| 15404-001 | 4′ (2 step) | 1AA | 1′ 9.5″ | 8′ 3.5″ | 2′ 1.5″ | 3″ | 4′ 3″ | 1′ 8.25″ | 5″ | 15.5 lbs |
| 15405-001 | 5′ (3 step) | 1AA | 2′ 8.5″ | 9′ 2.5″ | 2′ 8″ | 3″ | 5′ 2.5″ | 1′ 9.5″ | 5″ | 19 lbs |
| 15406-001 | 6′ (4 step) | 1AA | 3′ 7.5″ | 10′ 1.75″ | 3′ 2″ | 3″ | 6′ 3.5″ | 1′ 10.75″ | 5″ | 22.5 lbs |
| 15408-001 | 8′ (6 step) | 1AA | 5′ 6.25″ | 12′ .25″ | 4′ 3″ | 3″ | 8′ 3″ | 2′ 1.25″ | 5″ | 30 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH  COMFORT PLATFORM 13″ X 13″

# TELECOMBO™

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. WALL PAD
2. QUICK-LATCH™ HINGE
3. BUBBLE LEVEL
4. GROUND CUE®
5. WIDE FLARE FEET
6. REAR SECTION

**QUICK-LATCH™ HINGE**
For safe transition from extension to stepladder.

| PART NUMBER | MODEL | STEPLADDER MAX REACH* | EXTENSION MAX REACH* | STORAGE WIDTH | WEIGHT |
|---|---|---|---|---|---|
| 13946-001 | 6′ | 10′ 3″ | 12′ 1″ | 2′ 1″ | 35 lbs |
| 13947-001 | 7′ | 11′ 2″ | 14′ | 2′ 4″ | 40.3 lbs |
| 13948-001 | 8′ | 12′ 2″ | 15′ 10″ | 2′ 4″ | 43.5 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH



# DARK HORSE™

**300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT**

1. MULTI-POSITION ARTICULATING HINGES
2. RAPID LOCKS™
3. NON-CONDUCTIVE, HI-VIZ GREEN FIBERGLASS
4. WIDE-FLARED BASE
5. TIP & GLIDE™ WHEELS

**EXTENSION**

**90 DEGREE**

| PART NUMBER | MODEL | STEPLADDER HIGHEST STANDING LEVEL | STEPLADDER MAX REACH* | EXTENSION HIGHEST STANDING LEVEL | EXTENSION MAX REACH* | STORAGE HEIGHT | SSTORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|---|
| 16113-001 | 13′ | 1′ - 2′ 11″ | 5′ 5″ | 3′ 10″ - 7′ 9″ | 14′ 3″ | 3′ 7″ | 9″ | 31.5 lbs |
| 16117-001 | 17′ | 1′ 11″ - 4′ 10″ | 11′ 4″ | 5′ 9″ - 11′ 7″ | 18′ 1″ | 4′ 7″ | 9″ | 37.5 lbs |
| 16122-001 | 22′ | 2′ 11″-6′ 8″ | 13′ 2″ | 7′ 10″ - 15′ 6″ | 22′ | 5′ 7″ | 9″ | 46 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH

# CONQUEST™

**TYPE IA - 300 LBS RATED | TYPE IAA - 375 LBS RATED | OSHA + ANSI COMPLIANT**

1. MULTI-POSITION HINGES
2. RAPID LOCK®
3. AIR DECK™ ACCESSORY PORTS
4. NON-CONDUCTIVE FIBERGLASS
5. STRAIGHT LEGS TO ACCESS TIGHT SPACES
6. V-BAR
7. BEVELED CORNER FEET
8. HANDLE AND WHEELS FOR EASY TRANSPORT

### STAIRCASES

Adjust the sides of the ladder independently to work safely on stairs or other uneven surfaces.

### EXTENSION

Compact body can be configured into a large extension ladder.

### V-BAR

Optional add on: Non-marking, heavy duty V-bar grips poles and conforms to outside corners.

| PART NUMBER | MODEL | DUTY RATING | MAX REACH* | STEPLADDER SIZE MIN-MAX | EXTENSION SIZE MIN-MAX | EXT. HIGHEST STANDING LEVEL MIN-MAX | STORAGE HEIGHT | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|---|---|
| 17113-001 | 13 | IAA - 375 lbs | 14’ 3” | 3’ 6” - 5’ 6” | 3’ 10” - 7’ 9” | 6’ 11” - 10’ 11” | 3’ 7” | 10” | 32 lbs |
| 17117-001 | 17 | IA - 300 lbs | 18’ 1” | 4’ 6” - 7’ 6” | 9’ - 15’ | 5’ 9” - 11’ 7” | 4’ 7” | 10” | 37.5 lbs |
| 17122-001 | 22 | IA - 300 lbs | 22’ | 5’ 6” - 9’ 6” | 11’ - 19’ | 7’ 10” - 15’ 6” | 5’ 7” | 10” | 46 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH



# CONQUEST™ ALL-TERRAIN

**300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT**

1. MULTI-POSITION HINGES
2. RAPID LOCK®
3. NON-CONDUCTIVE FIBERGLASS
4. AIR DECK™ ACCESSORY PORTS
5. ADJUSTABLE OUTRIGGERS
6. V-BAR
7. INNOVATIVE FEET
8. HANDLE AND WHEELS FOR EASY TRANSPORT

### ADJUSTABILITY FOR UNEVEN TERRAIN

Equipped with adjustable outriggers that add side-tip stability and leg-leveling capability, so you can work safely on even the toughest terrain.

### EASILY LEANS ON POLES & CORNERS

The V-bar and innovative feet on the extension side of the ladder allows for easy setup on inside and outside corners, walls and poles.

| PART NUMBER | MODEL | STEPLADDER SIZE MIN-MAX | EXTENSION SIZE MIN-MAX | EXTENSION HIGHEST STANDING LEVEL | STORAGE HEIGHT | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|
| 17107-001 | 17 | 4’ 6” - 7’ 6” | 9’ - 15’ | 11’ 7” | 4’ 7” | 10” | 42 lbs |
| 17102-001 | 22 | 5’ 6” - 9’ 6” | 11’ - 19’ | 15’ 6” | 5’ 7” | 10” | 51 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH

# JUMBO STEP®

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. TOOL TRAY AND HANDRAIL
2. NON-SLIP STAIRCASE STEPS
3. SLIM PROFILE
4. NON-CONDUCTIVE FIBERGLASS
5. OVERSIZED FEET

### PORTABLE STAIRCASE

Three steps to your truck bed, grab your equipment, three steps back down—all while facing forward. This step stool is a genuine portable staircase.

### QUICK-RELEASE ROTATING HANDRAIL

The tool tray handrail quickly tucks away for situations when it isn't needed.

| PART NUMBER | MODEL | HIGHEST STANDING LEVEL | MAX REACH* | STEP WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|
| 11933 | 3 Step | 2′ 2″ | 8′ 8″ | 8.5″ | 4.5″ | 18 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH



# JUMBO STEP®

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. TOOL TRAY AND HANDRAIL
2. FULL-BOXED STEPS
3. EASY LATCH TABS
4. SLIM PROFILE
5. OVERSIZED FEET

### NON-SLIP STAIRCASE STEPS

Three steps to your truck bed, grab your equipment, three steps back down—all while facing forward. Ultra-wide, non-slip steps with almost no overlap make this step stool a genuine portable staircase.

### SLIM PROFILE

Stop lugging a ladder to do a stool's work. The Jumbo Step is lightweight, easy to carry, and folds into a slim storage profile.

| PART NUMBER | MODEL | HIGHEST STANDING LEVEL MIN-MAX | MAX REACH | STEP WIDTH | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|
| 11902 | 2 STEP | 1′ 6″ | 7′ 6″ | 8.5″ | 1′ 9″ | 4″ | 11.9 lbs |
| 11903 | 3 STEP | 2′ 2″ | 8′ 8″ | 8.5″ | 1′ 9″ | 4″ | 16.4 lbs |
| 11904 | 4 STEP | 2′ 11″ | 9′ 5″ | 8.5″ | 1′ 9″ | 4″ | 20 lbs |

A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH

# SAFETY STEP®

**300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT**

1. RUBBER PADDED NON-SLIP STEPS
2. SLIM PROFILE
3. TIP & GLIDE™ WHEELS

### NON-SLIP STAIRCASE STEPS

Safe, sturdy, non-slip portable staircase.

### SAFETY LOCKING HANDRAIL

Handrail keeps the ladder locked open until you release them for added security.

| PART NUMBER | MODEL | HIGHEST STANDING LEVEL MAX | MAX REACH | STEP WIDTH | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|
| 10210BA | 2 STEP | 2’ 8” | 9’ 2” | 14” | 1’ 10” | 5” | 15.5 lbs |
| 10310BA | 3 STEP | 3’ 7” | 10’ 1” | 14” | 1’ 10” | 5” | 21.5 lbs |
| 10410BA | 4 STEP | 3’ 8” | 9’ 5” | 14” | 1’ 10” | 5” | 27 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH



# SURE STEP™

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. QUICK SETUP
2. FULL-BOXED STEPS
3. OVERSIZED, REPLACABLE FEET
4. COMFORTABLE TO STRADDLE*
5. FUNCTIONAL TOP STEP SURFACE
6. NON-CONDUCTIVE FIBERGLASS

### STAND ON TOP

Our split top step means you have a wide platform when you’re furthest from the ground. Steps are climbable on both sides and support the straddle position.*

### QUICK ON ITS FEET

No hassle, no messing with latches and no pinched fingers.

| PART NUMBER | MODEL | HIGHEST STANDING LEVEL | MAX REACH** | STORAGE WIDTH AT BASE | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|
| 11953 | 3 Step | 2’ 3” | 8’ 9” | 1’ 6.5” | 8” | 8 lbs |

* SHOES SHOULD NOT EXCEED 13” FOR OPTIMAL USE
** A 5’ 6” PERSON WITH A 12” VERTICAL REACH

# ULTRA™

**300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT**

1. VERSATILE TOP CAP
2. XL STANDING PLATFORM
3. HIGH-VIZ GREEN
4. NON-CONDUCTIVE FIBERGLASS

## NON-CONDUCTIVE FIBERGLASS

The Ultra is made with strong, lightweight and non-conductive fiberglass.

## XL STANDING PLATFORM

Extra-wide 3” steps with treads prevent slipping and foot fatigue, and lead to a large standing step. At 169 sq inches, the XL standing step creates a sturdy workspace that fully supports the feet, allowing you to work in comfort for extended periods of time.

| PART NUMBER | MODEL | HIGHEST STANDING LEVEL MIN-MAX | MAX REACH* | PLATFORM WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|
| 11862 | 2 Step | 1’ 7” | 8’ 1” | 1’ 1”x1’ | 3” | 9.5 lbs |
| 11863 | 3 Step | 2’ 5” | 8’ 11” | 1’ 1”x1’ | 3” | 11.5 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH



# ULTRA™

**300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT**

1. VERSATILE TOP CAP
2. XL STANDING PLATFORM
3. AIRCRAFT GRADE ALUMINUM

## VERSATILE TOP CAP

The Ultra’s innovative top cap features accessory slots for existing and future Little Giant accessories (like the LootBox™ or Strap Holder™), a magnetic tray, a gallon and quart friction-lock system, tool holes, and slots.

## XL STANDING PLATFORM

Extra-wide 3” steps with treads prevent slipping and foot fatigue, and lead to a large standing step.

| PART NUMBER | MODEL | HIGHEST STANDING LEVEL MIN-MAX | MAX REACH* | PLATFORM WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|
| 11872 | 2 Step | 1’ 7” | 8’ 1” | 1’ 1”x1’ | 3” | 8 lbs |
| 11873 | 3 Step | 2’ 5” | 8’ 11” | 1’ 1”x1’ | 3” | 9 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH

# ADJUSTABLE SAFETY CAGE®

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

## ADJUSTS TO MULTIPLE WORKING HEIGHTS

### DEPLOYABLE OUTRIGGERS

Additional stability with deployable outriggers.

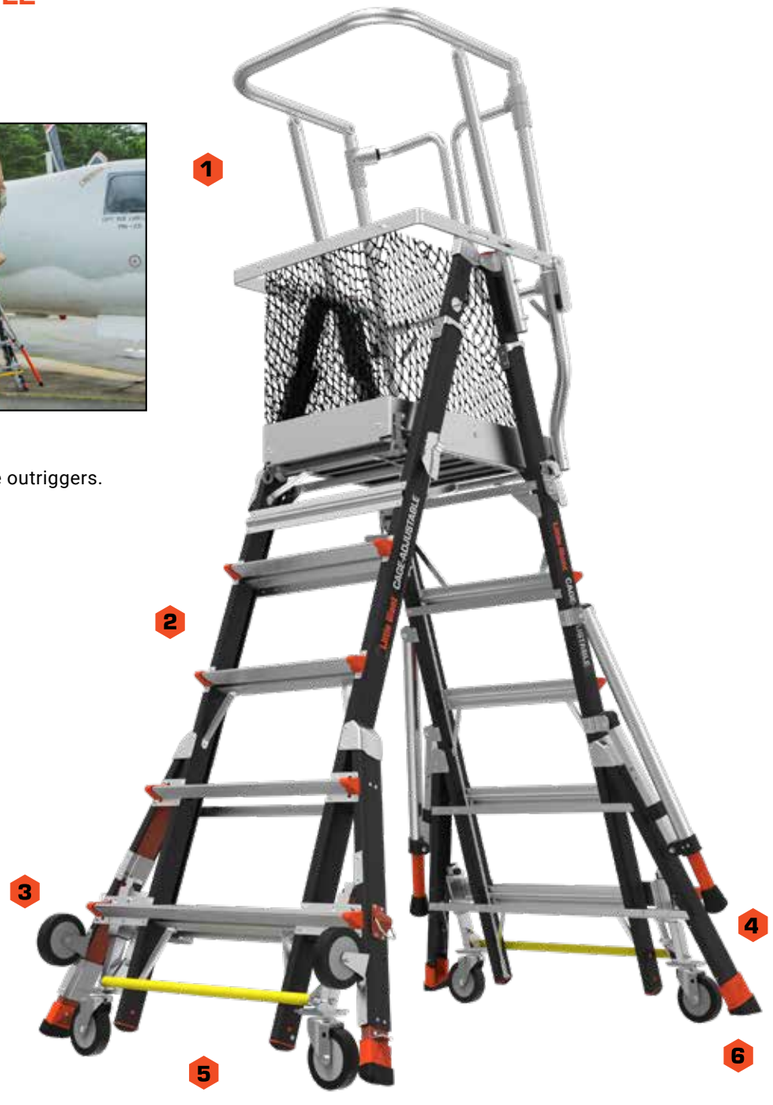


Many industries require professionals to tie off at an anchor point when working at certain heights. This standard helps keep people safe, but it can be a difficult standard to maintain. The OSHA-compliant Little Giant® Adjustable Safety Cage® eliminates the need to tie-off, making jobs faster, safer and less expensive than many scaffolding options. The Adjustable Safety Cage meets or exceeds all OSHA and ANSI standards and is rated IAA to hold 375 lbs.

### 1. FULLY ENCLOSED PLATFORM WITH NET

42” handrail plus midspan and toe kick can eliminate the need to tie off in most situations. Enclosed platform promotes comfort while elevated.

### 2. NON-CONDUCTIVE FIBERGLASS

Non-conductive fiberglass rails rated to hold up to 375 lbs.

### 3. TIP & GLIDE™ WHEELS

Easily move the Adjustable Safety Cage across the job site with Tip & Glide™ wheels.

### 4. DEPLOYABLE OUTRIGGERS

Outriggers help provide additional side-tip stability while in use. Adjustable Safety Cage passes all ANSI tests for stability without outriggers deployed.

### 5. WHEEL LIFT™ CASTERS

Easily move the Adjustable Safety Cage while fully deployed.

### 6. WIDE-FLARED BASE

Prevent incidents with a solid foundation, increasing side-tip stability.

### ADJUSTABLE LENGTH LEGS

Quickly adjust to staircases and other unlevel terrain.

### DID YOU KNOW?

The Adjustable Safety Cage can easily be set up by one person, unlike most scaffolding options.

| PART NUMBER | MODEL | HIGHEST STANDING LEVEL MIN-MAX | MAX REACH* | SPREAD MIN-MAX | STORAGE HEIGHT | WEIGHT |
|---|---|---|---|---|---|---|
| 18503-240 | 3’ - 5’ | 3’ - 4’ 11” | 11’ 5” | 3’ 9” - 5’ 11” | 7’ 10” | 102 lbs |
| 18503-817 | 3’ - 5’ | 3’ - 4’ 11” | 11’ 5” | 3’ 9” - 5’ 11” | 7’ 10” | 107 lbs |
| 18509-240 | 5’ - 9’ | 4’ 11” - 8’ 8.5” | 15’ 2” | 4’ 11” - 8’ 8.5” | 9’ 10” | 129 lbs |
| 18509-243 | 5’ - 9’ | 4’ 11” - 8’ 8.5” | 15’ 2” | 4’ 11” - 8’ 8.5” | 9’ 10” | 133 lbs |
| 18509-817 | 5’ - 9’ | 4’ 11” - 8’ 8.5” | 15’ 2” | 4’ 11” - 8’ 8.5” | 9’ 10” | 130 lbs |
| 18515-240 | 8’ - 14’ | 7’ 8.5” - 13’ 5” | 19’ 11” | 6’ 8.5” - 10’ 6” | 12’ 9” | 151 lbs |
| 18515-243 | 8’ - 14’ | 7’ 8.5” - 13’ 5” | 19’ 11” | 6’ 8.5” - 10’ 6” | 12’ 9” | 156 lbs |
| 18515-817 | 8’ - 14’ | 7’ 8.5” - 13’ 5” | 19’ 11” | 6’ 8.5” - 10’ 6” | 12’ 9” | 153 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH
AVAILABLE OPTIONS: -240 INCLUDES WHEEL LIFT AND NET, -243 INCLUDES WHEEL LIFT AND NET, ALL TERRAIN WHEELS AND -817 INCLUDES WHEEL LIFT AND NET, RATCHET LEVELING LEGS
BASE WIDTH: 3’ 9.5 ¨OUTRIGGERS NOT AVAILABLE ON 3’-5’ MODELS

# SAFETY CAGE®

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

### ENCLOSURE

Self-closing, one-way gates designed with ultimate safety in mind.

### PLATFORM

With a 18” X 22” standing surface you can safely and comfortably work up high in an enclosed platform.

It’s not a ladder, it’s the Little Giant® Safety Cage®. With the Safety Cage, you can access workspaces that would typically require tying off, setting up scaffolding or using a lift, all with less time and labor than other climbing solutions. The Safety Cage has a comfortable standing surface with a fully enclosed toe kick and wraparound enclosure, making it faster, safer and less expensive than many scaffolding or lift options. Plus, because you can work hands-free, the Safety Cage is perfect for jobs like maintaining large HVAC equipment or installing stage lighting.

### 1. FULLY ENCLOSED PLATFORM

42” handrail plus midspan and toe kick can eliminate the need to tie off in most situations. Enclosed platform promotes comfort while elevated.

### 2. GROUND CUE®

Audible “click” on the bottom step alerts you when you have reached the bottom step.

### 3. NON-CONDUCTIVE FIBERGLASS

Non-conductive fiberglass rails rated to hold up to 375 lbs.

### 4. WEIGHT ACTIVATED WHEELS

Spring-loaded caster wheels let you reposition the Safety Cage when it isn’t loaded. Just step off to move it, step on to secure it and step up to get stuff done.

### 5. ADJUSTABLE OUTRIGGERS

Outriggers help provide additional side-tip stability while in use. The Safety Cage passes all ANSI tests for stability without outriggers deployed.

### DID YOU KNOW?

The Safety Cage eliminates the tie-off requirement and is significantly lighter weight and easier to use than scaffolding.

### EASY TO SET UP AND TRANSPORT

Easy to move and set up. Saves time and money over scaffolding and lifts.

| PART NUMBER | MODEL | COMPARABLE STEP LADDER SIZE | HIGHEST STANDING LEVEL | MAX REACH* | SPREAD | STEP WIDTH | STORAGE HEIGHT | STORAGE WIDTH AT BASE | WEIGHT |
|---|---|---|---|---|---|---|---|---|---|
| 19702 | 2’ | 4’ | 1’ 10” | 8’ 4” | 2’ 10” | 3” | 6’ 6” | 2’ 3” | 45 lbs |
| 19704-146 | 4’ | 6’ | 3’ 8” | 10’ 2” | 3’ 11” | 3” | 8’ 6” | 2’ 11” | 54 lbs |
| 19706-146 | 6’ | 8’ | 5’ 7” | 12’ 1” | 5’ 1” | 3” | 10’ 6” | 3’ 2” | 65 lbs |
| 19708-146 | 8’ | 10’ | 7’ 5” | 13’ 11” | 6’ 3” | 3” | 12’ 6” | 3’ 5” | 69 lbs |
| 19710-146 | 10’ | 12’ | 9’ 4” | 15’ 10” | 7’ 5” | 3” | 14’ 7” | 3’ 8” | 81 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH
STORAGE DEPTH: 6” PLATFORM SIZE: 18” X 22” GUARDRAIL HEIGHT: 42”

# FORTRESS™

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. ENCLOSED PLATFORM
2. INNOVATIVE TOOL TRAY
3. GROUND CUE®
4. SIMPE SETUP AND STORAGE

### WRAP-AROUND TOOL TRAY

Keep you and your tools where you need them most, safe and by the work.

### ROOMY PLATFORM

Lengthy jobs require you to stand on a rung for extended periods? The platform eliminates that foot fatigue.

| PART NUMBER | MODEL | MAX REACH* | HIGHEST STANDING LEVEL MAX | FOOTPRINT | PLATFORM SIZE | STORAGE HEIGHT | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|---|
| 19303 | 3′ | 9′ 2″ | 2′ 8″ | 3′ 2″ | 1′ 7″x 1′ 5″ | 7′ 3″ | 4.5″ | 29 lbs |
| 19304 | 4′ | 10′ 1″ | 3′ 7″ | 3′ 8″ | 1′ 7″x 1′ 5″ | 8′ 3″ | 4.5″ | 33 lbs |
| 19305 | 5′ | 11′ | 4′ 6″ | 4′ 2″ | 1′ 7″x 1′ 5″ | 9′ 3″ | 4.5″ | 37 lbs |
| 19306 | 6′ | 12′ | 5′ 6″ | 4′ 8″ | 1′ 7″x 1′ 5″ | 10′ 3″ | 4.5″ | 41 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH



# DS-XL™

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. RUBBER IMPACT BUMPERS
2. EXTRA DEEP STEPS
3. 2 DUAL GROUND CUE®
4. EXTRA DEEP STEPS
5. TIP & GLIDE™ WHEELS
6. LONG LIFE FEET

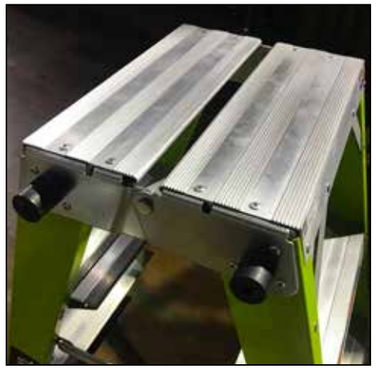

### TWO-PERSON LADDER

The DS-XL™ is designed as a true two-person stepladder. With its wide steps, both users will feel comfortable while working on the ladder. Made with Hi-Viz Green fiberglass, the ladder is non-conductive, and the color promotes safety, as it is the most visible color to the human eye.

| PART NUMBER | MODEL | STEPLADDER HIGHEST STANDING LEVEL | MAX REACH* | SPREAD | STORAGE HEIGHT | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|
| 15784-001 | 4′ | 1′ 11″ | 8′ 5″ | 3′ 8″ | 4′ 2″ | 10″ | 28 lbs |
| 15786-001 | 6′ | 3′ 9.5″ | 10′ 3.5″ | 5′ | 6′ 2″ | 10.5″ | 35.5 lbs |
| 15788-001 | 8′ | 5′ 8″ | 12′ 2″ | 6′ 5″ | 8′ 2″ | 10.5″ | 47 lbs |

* A 5′ 6″ PERSON WITH A 12″ VERTICAL REACH

# SKYSCRAPER™

**300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT**

1. PALM BUTTONS
2. SAFETY STRAPS
3. LOCK TABS
4. IDEAL FOR STAIRCASES
5. UNMATCHED HEIGHTS
6. REPLACEABLE FEET

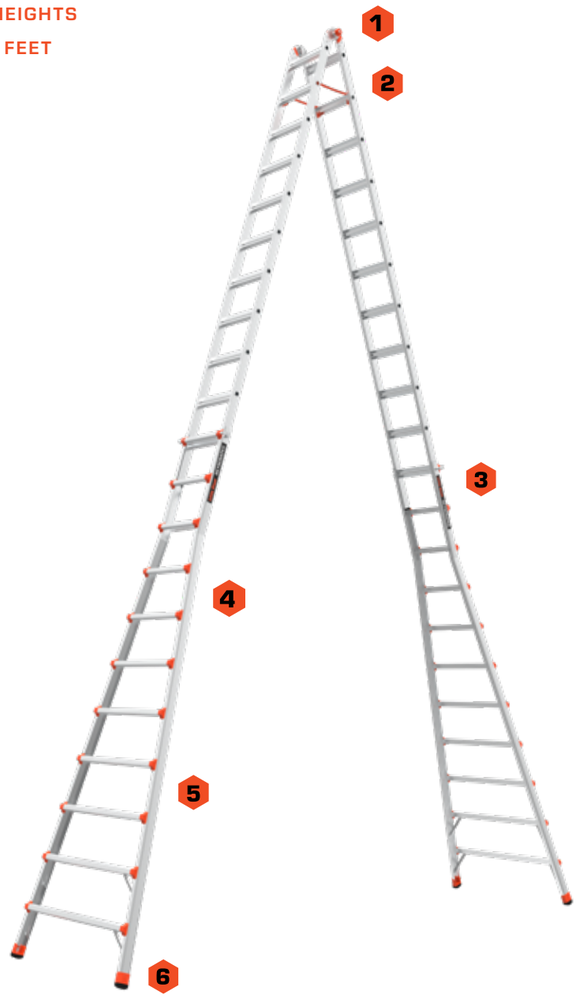


## UNMATCHED HEIGHTS

The SkyScraper is designed to help you reach chandeliers, skylights and other difficult positions in rooms with high vaulted ceilings.

| PART NUMBER | MODEL | STEPLADDER HIGHEST STANDING LEVEL | STEPLADDER MAX REACH* | SPREAD | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|
| 10109 | 15’ | 12’ 3” | 18’ 9” | 10’ 10” | 3’ 1” | 8” | 71.3 lbs |
| 10110 | 17’ | 14’ 1” | 20’ 7” | 12’ 11” | 3’ 1” | 8” | 79 lbs |
| 10121 | 21’ | 17’ 11” | 24’ 5” | 15’ 3” | 3’ 7” | 8” | 102 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH



# SELECT STEP®

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT**

1. ACCESSORY PORTS ON TOP CAP
2. WIDE RUNGS
3. INDEPENDENTLY ADJUSTABLE OUTER SECTIONS
4. COMFORT PLATFORM
5. TIP & GLIDE™ WHEELS

## ADJUSTABILITY

Easily adjusts to multiple configurations and sizes: Stepladder, 90°, Sloping Ground. With 5’,6’,7’,8’ ladders in one, no job is out of reach.

## ACCESSORY PORTS + AIRDECK

Ports allow use of Little Giant AirDeck® accessory in vertical and horizontal positions.
(INCLUDED WITH SOME MODELS)

| PART NUMBER | MODEL | HIGHEST STANDING LEVEL MIN-MAX | MAX REACH | SPREAD MIN-MAX | STORAGE HEIGHT | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|---|---|---|
| 15130-001 | 5-8 | 2’ 10” - 5’ 8” | 12’ 4” | 3’ 5” - 5’ 2.5” | 5’ 1.5” | 8.5” | 34 lbs |
| 15131-001 | 6-10 | 3’ 10” - 7’ 7” | 14’ 1” | 4’ - 6’ 5” | 6’ 1” | 9” | 41 lbs |
| 15131-920 | 6-10 | 3’ 10” - 7’ 7” | 14’ 1” | 4’ - 6’ 5” | 6’ 1” | 9” | 41 lbs |

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH

UNDERGROUND

# UTILITY ACCESS™

**375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT***

1. MULTIPLE CONFIGURATIONS
2. RAPID LOCK® FASTENERS
3. NARROW ACCESS

### RAPID LOCKS®

Quickly adjust and fasten the different size extender sections to your ladder.

### SWIVEL FEET

* Optional with -272 part numbers

BASE SECTIONS

### MIX AND MATCH

The UUA ladder allows you the ability to mix and match different sized bases and upper sections, so you can get the perfect size for the job at hand.

### UPPER SECTIONS

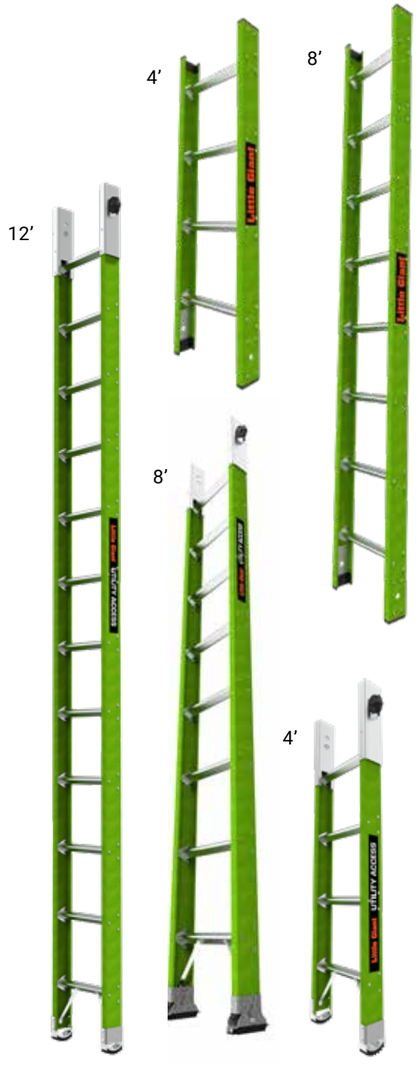




VERSATILITY IN REACHING DEPTHS

## THE PERFECT LADDER FOR NARROW ACCESS POINTS

| PART NUMBER | DESCRIPTION | EXTENSION LADDER SIZE | TRIANGLE RUNG WIDTH | STORAGE HEIGHT | STORAGE WIDTH | WEIGHT |
|---|---|---|---|---|---|---|
| 18004 | UNDERGROUND UTILITY ACCESS, 4’ BASE ASSEMBLY, TYPE 1AA, FG LADDER | 4’ - 12’ | 1.5” | 4’ 8” | 1’ 3” | 16.5 lbs |
| 18004-272 | UNDERGROUND UTILITY ACCESS, 4’ BASE ASSEMBLY, TYPE 1AA, FG LADDER w/ SWIVEL FEET | 4’ - 12’ | 1.5” | 4’ 8” | 1’ 3” | 16.5 lbs |
| 18008-272 | UNDERGROUND UTILITY ACCESS, 8’ BASE ASSEMBLY, TYPE 1AA, FG LADDER w/ SWIVEL FEET | 8’ - 16’ | 1.5” | 8’ 8” | 1’ 3” | 20 lbs |
| 18002 | UNDERGROUND UTILITY ACCESS, 12’ BASE ASSEMBLY, TYPE 1AA, FG LADDER | 12’ - 20’ | 1.5” | 8’ 5” | 1’ 3” | 23.5 lbs |
| 18008-272 | UNDERGROUND UTILITY ACCESS, 8’ BASE ASSEMBLY, TYPE 1AA, FG LADDER w/ SWIVEL FEET | 8’ - 16’ | 1.5” | 8’ 8” | 1’ 3” | 20 lbs |
| 18002-272 | UNDERGROUND UTILITY ACCESS, 12’ BASE ASSEMBLY, TYPE 1AA, FG LADDER w/ SWIVEL FEET | 12’ - 20’ | 1.5” | 12’ 8” | 1’ 3” | 23.5 lbs |
| 18114 | UNDERGROUND UTILITY ACCESS, 4’ UPPER ASSEMBLY, FIBERGLASS ACCESSORY | Attach to Base | 1.5” | 4’ | 1’ 3” | 7 lbs |
| 18118 | UNDERGROUND UTILITY ACCESS, 8’ UPPER ASSEMBLY, FIBERGLASS ACCESSORY | Attach to Base | 1.5” | 7’ 11” | 1’ 3” | 13 lbs |

* SPECIAL PURPOSE LADDER. COMPLIES WITH ALL APPLICABLE OHSA AND ANSI A14 STANDARDS, EXCEPT BASE WIDTH AND RUNG SPACING.

# ACCESSORIES

**15040-001** CARGO HOLD

**15050-001** FUEL TANK

**10104** WORK PLATFORM

**15097** LADDER RACK

**26057-001** AIRDECK WORKSTATION

**15044-002** LOOT BOX

Equipment Bucket, Combination Ladder Accessory

**10170** PLATFORM PRO

300 lb Capacity, Accessory for Articulated Extendable Ladders

**15072-001** SADDLE BAG

Tool bag Accessory for CAGE Elevated Enclosed Platforms

**15042-002** STRAP HOLDER

Plumbers Stap Dispenser, Ladder Accessory

**15012** PROJECT TRAY

**15038** TOOL TRAY XL

Two position Project Tray, Compatible with Multi-position Ladder Family

**15047-002** TOOL TRAY

Project Tray, Compatible with Multi-position Ladder Family - Retail Packaging

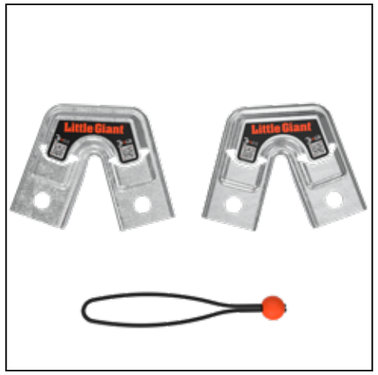

**26999** TRESTLE BRACKETS

Rail Connectors, Articulating Ladder Accessory

# PLANKS

### 15036 PLANK

6-Foot Model, 500 lb Two Person Rated,
Aluminum Ladder Accessory

### 15180 PLANK

8-Foot Model, 500 lb two person Rated,
Aluminum Ladder Accessory

### 15210 PLANK

10-Foot Model, 500 lb Two Person Rated,
Aluminum Ladder Accessory

| PART NUMBER | MODEL | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|
| 15036 | 6′ | 1′ 3″ | 2.5″ | 14.5 lbs |
| 15180 | 8′ | 1′ 3″ | 2.5″ | 22.1 lbs |
| 15210 | 10′ | 1′ 3″ | 2.5″ | 26.6 lbs |

### 11069 ADJUSTABLE PLANK

6-9-Foot Model, 500 lb two person Rated,
Aluminum Ladder Accessory

### 11813 ADJUSTABLE PLANK

8-13-Foot Model, 500 lb Two Person Rated,
Aluminum Ladder Accessory

### 11915 ADJUSTABLE PLANK

9-15-Foot Model, 500 lb two person Rated,
Aluminum Ladder Accessory

| PART NUMBER | MODEL | STORAGE WIDTH | STORAGE DEPTH | WEIGHT |
|---|---|---|---|---|
| 11069 | 6′-9′ | 1′ 1″ | 3″ | 32.5 lbs |
| 11813 | 8′-13′ | 1′ 1″ | 3″ | 39 lbs |
| 11915 | 9′-15′ | 1′ 1″ | 3″ | 43.5 lbs |

## ACCESSORIES COMPATIBILITY CHART

| PART NUMBER | DESCRIPTION | ADJUSTABLE CAGE | A-FORCE300 | CONQUEST | DARK HORSE | DS-XL | FORTRESS | HYPERLITE | JUMBO STEP | KING KOMBO | MIGHTYLITE | SAFETY CAGE | SELECT STEP | SENTINEL | SKYSCRAPER | SUMOSTANCE | SURE STEP | TELECOMBO | ULTRA | UNDERGROUND UTILITY ACCESS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 26057-001 | AIRDECK WORKSTATION | | | ● | | | | | | | | | ● | | | | | | | |
| 15040-001 | CARGO HOLD | | | ● | ● | | | | | | | | | | ● | | | | | |
| 15050-001 | FUEL TANK | | | ● | ● | | | | | | | | ● | | ● | | | | | |
| 15097 | LADDER RACK | | ● | ● | ● | | | | ● | ● | ● | | ● | | | ● | | ● | | |
| 15044-002 | LOOT BOX, EQUIPMENT BUCKET | | ● | | | | ● | | | ● | | | | ● | | | | | ● | |
| 10170 | PLATFORM PRO | | | ● | ● | | | | | | | | | | ● | | | | | |
| 15012 | PROJECT TRAY | | | ● | ● | | | | | | | | | | ● | | | | | |
| 15072-001 | SADDLE BAG, TOOL BAG | ● | | | | | | | | | | ● | | | | | | | | |
| 15042-002 | STRAP HOLDER, PLUMBERS STAP DISPENSER | | ● | | | | ● | | | ● | | | | ● | | | | | ● | |
| 15047-002 | TOOL TRAY, INSTALLABLE PROJECT TRAY | | | ● | ● | | | | | | | | | | | | | | | |
| 26999 | TRESTLE BRACKETS | | | ● | ● | | | | | | | | | | | | | | | |
| 10104 | WORK PLATFORM | | | ● | ● | | | | | | | | | | ● | | | | | |
| 11069 | ADJUSTABLE PLANK, 6-9 FT | | | ● | ● | | | | | | | | | | | | ● | | | |
| 11813 | ADJUSTABLE PLANK, 8-13 FT | | | ● | ● | | | | | | | | | | | | ● | | | |
| 11915 | ADJUSTABLE PLANK, 9-15 FT | | | ● | ● | | | | | | | | | | | | ● | | | |
| 15036 | ADJUSTABLE PLANK, 6 FT | | | ● | ● | | | | | | | | | | | | ● | | | |
| 15180 | ADJUSTABLE PLANK, 8 FT | | | ● | ● | | | | | | | | | | | | ● | | | |
| 15210 | ADJUSTABLE PLANK, 10 FT | | | ● | ● | | | | | | | | | | | | ● | | | |

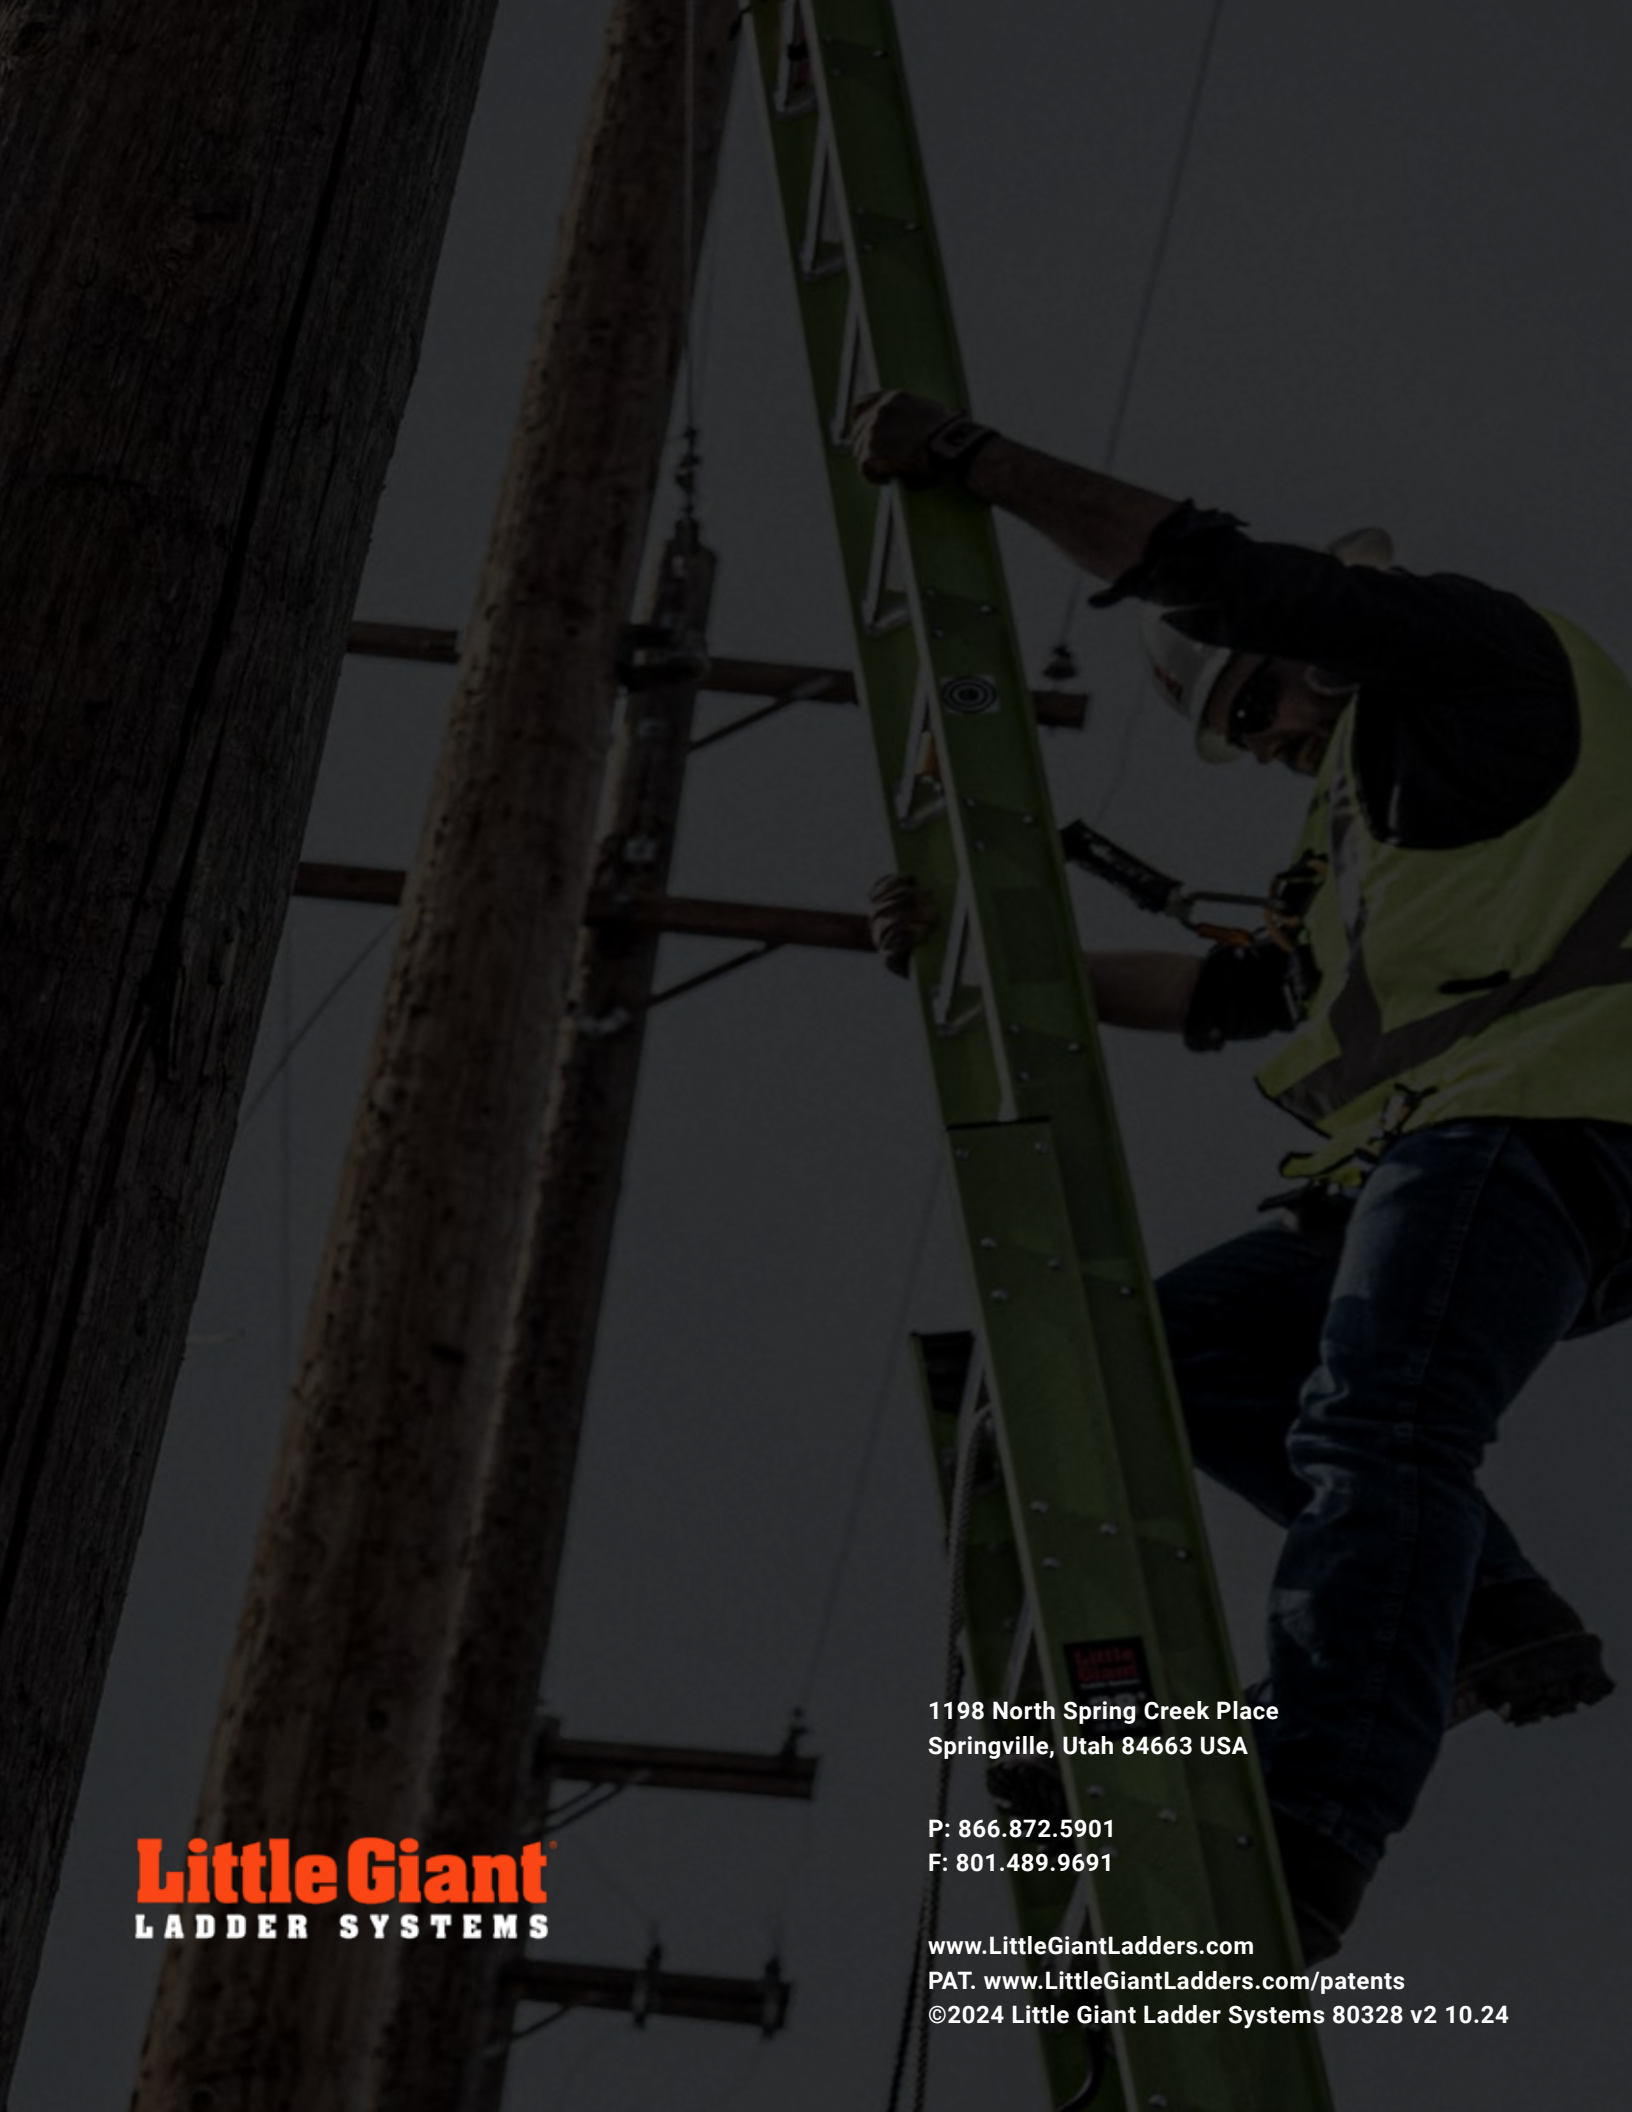

Little Giant
LADDER SYSTEMS

1198 North Spring Creek Place
Springville, Utah 84663 USA

P: 866.872.5901
F: 801.489.9691

www.LittleGiantLadders.com
PAT. www.LittleGiantLadders.com/patents
©2024 Little Giant Ladder Systems 80328 v2 10.24